

FINE FISSURED Black

FINE FISSURED

www.armstrong.eu



FINE FISSURED



| FINE FISSURED | BOARD | TEGULAR | MICROLOOK |
|--------------------|--|--|--|
| | Prelude XL ² /TLX 24 mm Prelude Sixty ² | Prelude XL ² /TLX 24 mm Prelude Sixty ² | Prelude XL ² /TL 15 mm Interlude XL ² 15 mm |
| | | | |
| 600 x 600 x 15 mm | 9121 M* | 9122 M | 9202 M |
| 625 x 625 x 15 mm | 9121 D | 9122 D | |
| 600 x 1200 x 15 mm | 9120 M | | |




*Colours: Board 600 x 600 mm is available in Black (BK).



EN ISO 354 & EN ISO 11654

| α_w | NRC | 125 | 250 | 500 | 1000 | 2000 | 4000 | Hz |
|----------------|------|------|------|------|------|------|------|------------|
| 0.60(H) | 0.60 | 0.40 | 0.40 | 0.55 | 0.75 | 0.75 | 0.75 | α_p |

Sound Absorption Class = C

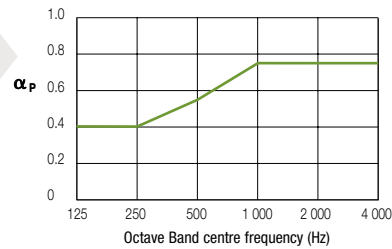

EN 20140-9 & EN 717-1

| D_{ncw} |
|--------------|
| 34 dB |



| | |
|---------------------------------|--------------------------|
| EEA Euroclass A2-s1, d0 | RUS KM1 (G1, V1, D1, T1) |
| EEA Euroclass A2-s2, d0 (Black) | FZ 123 |

EN 13501-1



EN 12667 & ISO 8301

$\lambda = 0.06 \text{ W/m K}$



95 % RH



≈ 3.5 kg/m²



Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu

